

## Demolition Traffer



## **Standard Features**


- Body material Hardox 450
- Frame QT100 Steel
- Approximate body length 40' 83.7 yd³
- Approximate fully dressed weight: 29,000 pounds
- HT300 (30,000 pound) air ride suspension
- Two-speed landing gear
- · Certified folding rear impact guard
- Blasted with powder coat primer and top coat
- DOT Compliant Grote sealed harness & LED lights
- Steel white rims on Sailun 11R24.5 tires
- Aluminum front fenders

- Hardox sloped rear body extension fenders
- · Duralite hub pilot CentriFuse drums
- Meritor 2S1M ABS & TSE 30/30 extended life pots
- 16.5"×7" "Q" brake shoes
- · Heavy duty rear push bumper
- Driver's side rear steps
- · Rear lower light bar
- Proprietary boxed skid plate behind kingpin
- Sloped protector plate over rear air bags
- Two-piece side swing gates
- 9" front mount telescopic hoist
- Front ladder and standing platform


## **Available Options**

- Mid mount stabilizer scissor assembly
- · Corrugated floor
- Work lights
- · Various floor and wall thicknesses
- Various styles and sizes of rims and tires
- Tarps
- Custom ladders and catwalks
- Remote grease hose for bottom hoist fitting
- Extra mid-frame air gauge
- Additional 9" height for 92.7 Cubic yard



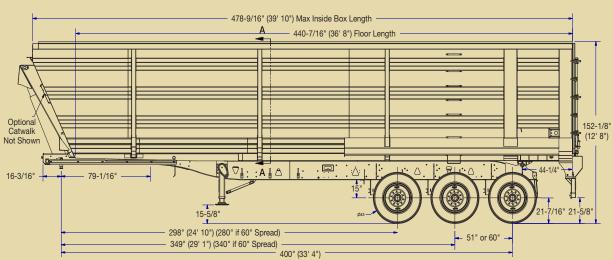







We reserve the right to modify, change or revise published specifications without prior notice in order to continually strive for product improvement.

